

## Screw

- 3, 4, 6, 10, 16, 24, 32, 48 Contacts
- Current: 10A, 16A
- Temperature resistance up to 200°C

## G High temperature resistance series



# High temperature resistance!!!

Preform molds, precision extrusion molds, hot runners,  
ideal high-temperature resistant heavy-duty connectors!

**New**

**Application**

Preform molds, precision extrusion molds, hot runners,  
ideal high-temperature resistant heavy-duty connectors

**high-temperature resistant heavy-duty connectors**



**There are upgraded products now!**

**HLA3**

3 +



- Code A3P-G
- Product Description Male

- Code A3S-G
- Product Description Female

- Code A3TEL-G
- Product Description Hood

- Code A3OSL-G
- Product Description Housing

- Code A3BSL-G
- Product Description Housing

**HLE10**

10+



- Code E10P-G
- Product Description Male



- Code E10S-G
- Product Description Female

- Code E10TE-G
- Product Description Hood

- Code E10BH-G
- Product Description Housing

**HLE16**

16+

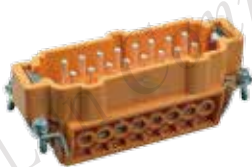

- Code E16P-G
- Product Description Male

- Code E16S-G
- Product Description Female

- Code E16TE-G
- Product Description Hood

- Code E16BH-G
- Product Description Housing

G



TUV SUD



ISO9001

ISO14001

ISO45001



华伦连接器  
HuaLun Connector

## HLE24

24+



● Code E24P-G  
● Product Description Male

E24S-G  
Female

E24TE-G  
Hood

E24BH-G  
Housing

## HLE32

32+



● Code E32P-G  
● Product Description Male


E32S-G  
Female

E32TE-G  
Hood

E32BH-G  
Housing

## HLE48

48+

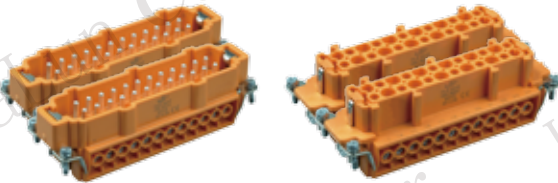

● Code E48P-G  
● Product Description Male

E48S-G  
Female

E48TE-G  
Hood

E48BH-G  
Housing



G