



TUV SUD



ISO9001 ISO14001 GB/T28001



华伦连接器
HuaLun Connector

HSL Connectors Stage Lighting

Product Features

- Protection Degree: IP67 (when mated, wired and mounted according to DS)
- Interchangeable with equivalent products, e.g Socapex, KUPO
- Shell: Aluminum Alloy
- Coupling: thread
- Terminal: crimp, solder
- Indication signs are printed on the front and back surfaces of the insulator.
- Equipped with lengthened grounding pin in first mate/last break structure.



Technical Data


Rated Voltage: 700VDC, 500VAC

Rated Current: 25A, max 41A

Ambient Temperature: -55~125°C

Contact Plating: Gold

Female Connectors Part Number

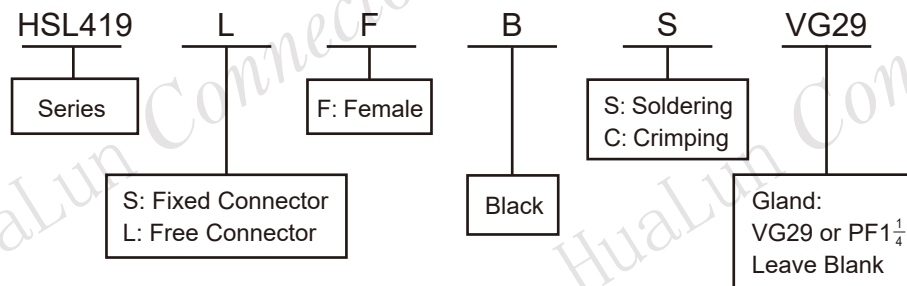

Free Female Connectors Part Number		Fixed Female Connectors Part Number	
B: Black HSL419LFB	Front View	B: Black HSL419SFB	Front View



TUV SUD




ISO9001 ISO14001 GB/T28001



华伦连接器
HuaLun Connector

Male Connectors Part Number

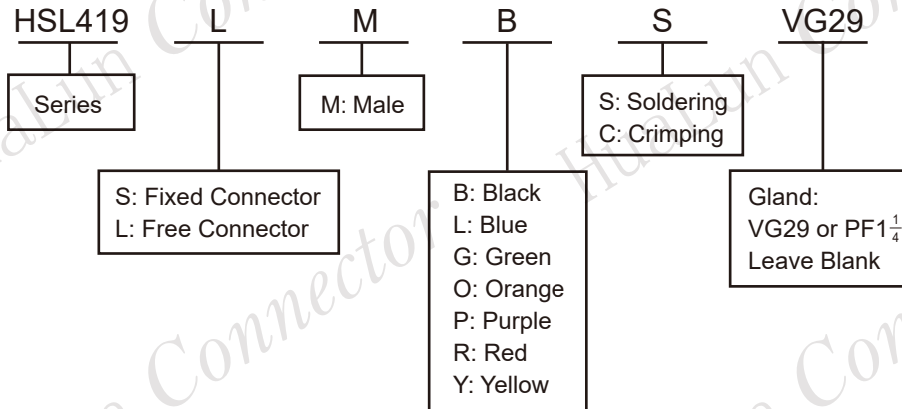

Free Male Connectors Part Number		Fixed Male Connectors Part Number	
	B: Black HSL419LMB		B: Black HSL419SMB
	L: Blue HSL419LML		L: Blue HSL419SML
	G: Green HSL419LMG		G: Green HSL419SMG
	O: Orange HSL419LMO		O: Orange HSL419SMO
	P: Purple HSL419LMP		P: Purple HSL419SMP
	R: Red HSL419LMR		R: Red HSL419SMR
	Y: Yellow HSL419LYM		Y: Yellow HSL419SMY



SHANGHAI HUALUN INSTRUMENTS & ELECTRONICS CO., LTD.

SALES & MARKETING DEPARTMENT

ADD: Rm3409, Tower2, Kerry Everbright City, West Tianmu Rd218, Shanghai

TEL: 86-21-63178300 63178586 63177566 FAX: 86-21-63178083

E-MAIL: liz@hualunconnector.com, sales@hualunconnector.com P.C.: 200070